

MC33 to MC64 Industrial Shock Absorbers

High energy capacity and robust design

Self-compensating

Energy capacity 170 Nm/cycle


to 5,650 Nm/cycle

Stroke 23.1 mm to 150 mm

MC33EUM

MC45EUM

MC64EUM

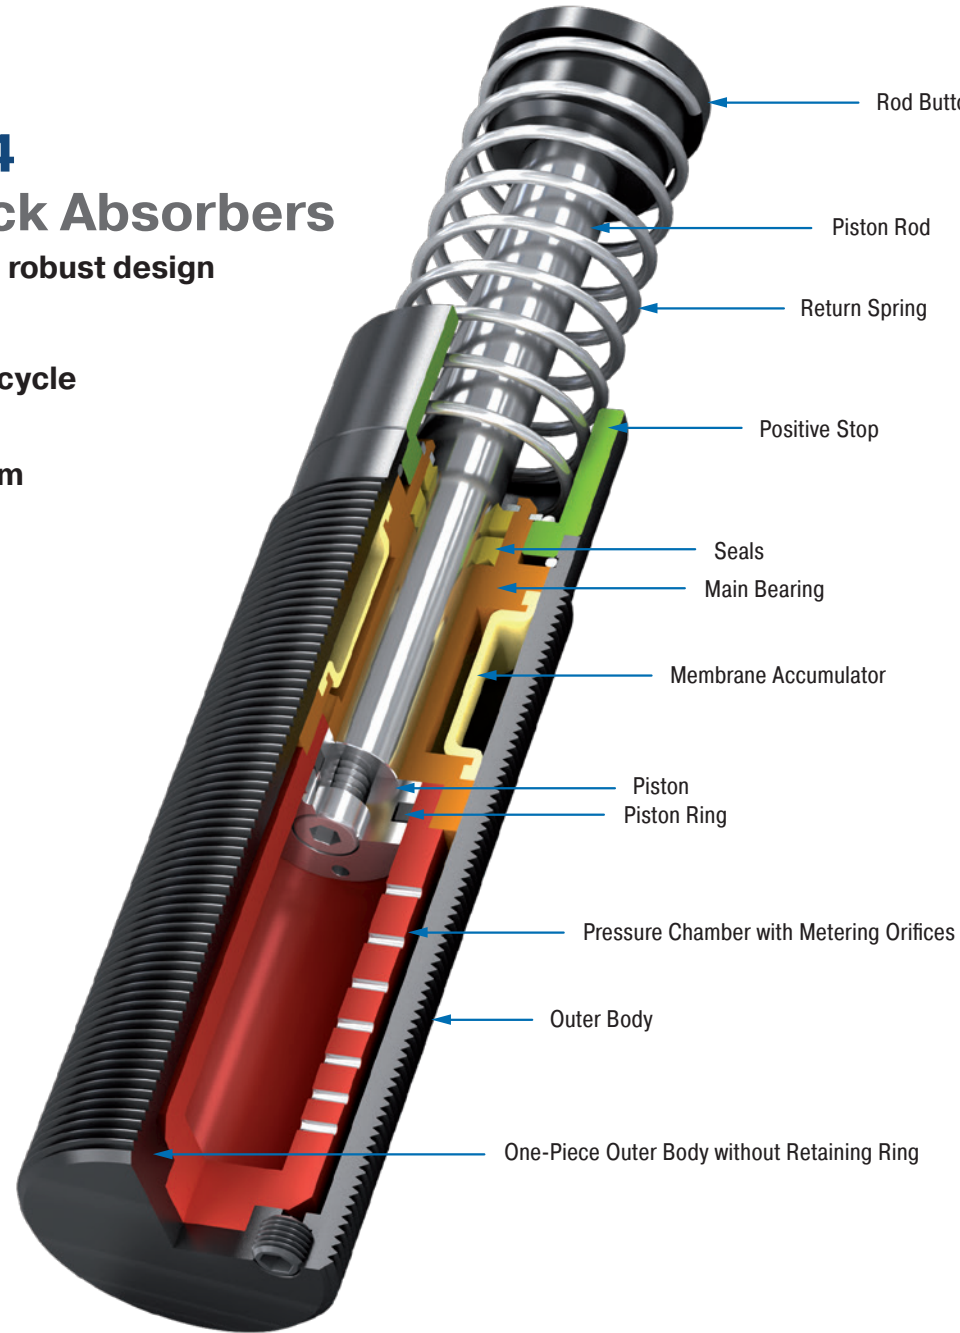

The identification numbers listed are the respective standard units of the corresponding shock absorber series. Special types can have deviating identification numbers.

Table of contents	Page
General instructions.....	2
Safety information	2
Intended use.....	2
Description and function.....	2
Calculation and design	2
Delivery and storage	2
Maintenance and care	2
Disassembly and disposal.....	2
Mounting instructions.....	3 - 8
Warranty	9
Expected service life	9
Technical data.....	9

General instructions


This manual is for the disruption-free use of the product types listed on page 1; its compliance is a prerequisite for the fulfilment of any warranty claims.

Therefore, make sure to read this manual before use.


Please always maintain the specified limits from the performance table (technical data). Take into account the predominant environmental conditions and restrictions. Note the regulations of the trade association, TÜV or corresponding national, international and European regulations. Installation and commissioning only according to mounting instructions.

the entire stroke. A requirement for a constant rate of deceleration is the correct calculation of the industrial shock absorber and therefore the correct selection of the right metering orifice pattern or the right hardness level of the shock absorber. The hardnesses are graded from -0 (soft) to -4 (hard).

General Function

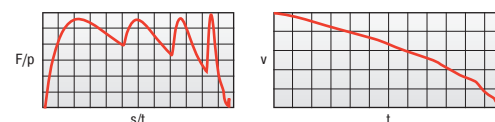

F = Force (N) p = Internal pressure (bar) s = Stroke (m)
t = Deceleration time (s) v = Velocity (m/s)

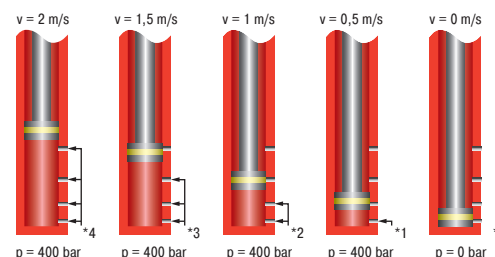

* The load velocity reduces continuously as you travel through the stroke due to the reduction in the number of metering orifices (*) in action. The internal pressure remains essentially constant and thus the Force vs. stroke curve remains linear.

Calculation and design

In order to ensure an optimum, fault-free and durable function of the industrial shock absorbers they must be correctly dimensioned and designed. The following parameters must be known and used in the calculation:

- Moving mass [kg]
- Impact velocity of the mass into the shock absorber(s) [m/s]
- Additionally acting propelling force, propelling power or propelling torque [N, kW, Nm]
- Number of shock absorbers acting in parallel [n]
- Number of strokes or cycles per hour [1/h]

The correct size of the shock absorbers can be determined with the ACE online calculation programme at www.ace-ace.de. You can also send us the completed online form via e-mail for checking.

Or make use of our free calculation service by phoning: +49 (0)2173 - 9226-20.

Safety information

WARNING

- ! If ACE industrial shock absorbers are used where a failure of the product could lead to personal injuries and/or material damage, additional safety elements must be implemented.
- ! Free-moving masses can lead to injuries by crushing during installation of the shock absorber. Secure moving masses against inadvertent starting with suitable safety precautions before installing the shock absorbers.

Intended use

ACE industrial shock absorbers are used wherever moving masses are to be slowed down in a defined end position. The industrial shock absorbers are designed for force capacity in an axial direction. Within the permissible load limits the industrial shock absorber also acts as a stop.

Description and function

The ACE industrial shock absorbers MC33 to MC64 are maintenance-free, ready-to-install hydraulic components with numerous metering openings.

During the slowing down process the moving mass moves with kinetic energy and, if necessary, an additional drive energy in the axial direction of the piston rod with a defined impact velocity against the rod end button of the shock absorber. Alternatively, numerous shock absorbers can also be used in parallel. During the initiated slowing down process the piston rod is pushed into the shock absorber. The hydraulic oil located before the piston is displaced through all metering orifices at the same time. The number of effective metering openings reduces in proportion to the driven stroke. The retraction speed reduces. The dynamic pressure applied in front of the piston corresponds to the counterforce applied by the shock absorber and remains approximately constant over

WARNING

- ! The dampers must be dimensioned in such a way that the calculated values do not exceed the maximum values of the respective performance table (technical data):
W₃ [Nm/cycle]
W₄ [Nm/h]
Effective weight me
Max. side load angle [°]
- ! For a correct damping design the shock absorber must represent the only braking system. Additional braking systems, such as a pneumatic end position damping length, must not overlap with the end position damping length by the shock absorber and must be disabled.

Delivery and storage

- After delivery please check the shock absorber for any damage.
- The shock absorber can become damaged if it falls. Carefully remove shock absorber from the packaging.
- Shock absorbers can generally be stored in any position.
- Storage in the original packaging is preferred.
- Always store shock absorbers in a dry place in order to avoid oxidation.
- The recommended maximum storage time is three years.

Maintenance and care

Regularly check the shock absorbers for oil loss, return of the piston rod and external damage.

Shock absorbers are machine elements that are subject to continuous wear. Increased service life results in reduced damping effect. If this is no longer sufficient, the shock absorbers must be replaced or exchanged as appropriate.

Disassembly and disposal

Take account of environmental protection (recovery of problematic substances) during disposal of the shock absorber. The MC industrial shock absorbers are filled with automatic fluid (ATF) oil. The corresponding data sheet is available on request.

Faulty dampers can be sent to our service department for determination of the cause of failure.

Mounting instructions and mounting accessories

Installation instructions

Before installation and use check whether the identification number on the damper or on the packaging matches the respective designation on the delivery note. Industrial shock absorbers are maintenance-free and ready to install.

Operating temperature range: -12 °C to 66 °C

Mounting: As required but always in such a way that the entire damper stroke is used. The dampers must always be mounted in such a way that the forces are introduced centrally over the piston rod. The maximum permissible side load angle (see table) must not be exceeded. If there is a side load angle, it generally leads to a reduction in service life. In the case of maximum permissible values being exceeded a side load adapter must be used.

Self-compensating: The MC range of shock absorbers is self-compensating. In a selectable range according to a table, the different effects of power, weight, temperature and speed balance out independently. The shock absorbers are divided into five hardness ranges (me min. to me max.) as standard. The grading ranges from -0 (very soft) to -4 (very hard).

Commissioning


- After installation, start a test run of the moving mass at reduced operating speed to begin with.

During the test run

- Gradually accelerate the load capacity up to the subsequent operating speed. You can find this in the calculation for your application. In the correct final setting, the piston rod of the shock absorber reaches the end position (positive stop) without a hard stop.

Mounting accessories

Information on the corresponding mounting accessories can be found on the following pages.

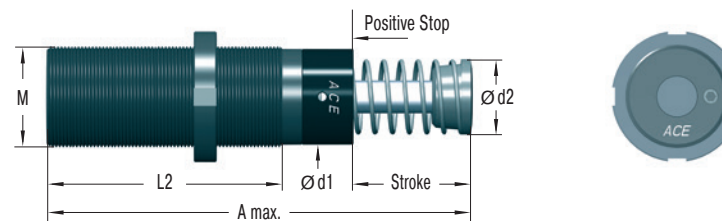

Thread M36x1.5 and M42x1.5 on request
Thread UNF 1 1/4-12 (omit suffix -M from part number)

Dimensions

TYPES	Stroke mm	A max. mm	d1 mm	d2 mm	L2 mm	M
MC3325EUM	23.2	138	30	25	83	M33x1.5
MC3350EUM	48.6	189	30	25	108	M33x1.5

Performance data

TYPES	Max. Energy Capacity				Effective Weight			Return Force min. N	Return Force max. N	Return Time s	° Side Load Angle max.	Weight kg
	¹ W ₃ Nm/cycle	W ₄ Nm/h	W ₄ with Oil Tank Nm/h	W ₄ with Oil Recirculation Nm/h	² me min. kg	² me max. kg	Hardness					
MC3325EUM-0	170	75,000	124,000	169,000	3	11	-0	45	90	0.03	4	0.51
MC3325EUM-1	170	75,000	124,000	169,000	9	40	-1	45	90	0.03	4	0.51
MC3325EUM-2	170	75,000	124,000	169,000	30	120	-2	45	90	0.03	4	0.51
MC3325EUM-3	170	75,000	124,000	169,000	100	420	-3	45	90	0.03	4	0.51
MC3325EUM-4	170	75,000	124,000	169,000	350	1,420	-4	45	90	0.03	4	0.51
MC3350EUM-0	330	85,000	135,000	180,000	5	22	-0	45	135	0.06	3	0.63
MC3350EUM-1	330	85,000	135,000	180,000	18	70	-1	45	135	0.06	3	0.63
MC3350EUM-2	330	85,000	135,000	180,000	60	250	-2	45	135	0.06	3	0.63
MC3350EUM-3	330	85,000	135,000	180,000	210	840	-3	45	135	0.06	3	0.63
MC3350EUM-4	330	85,000	135,000	180,000	710	2,830	-4	45	135	0.06	3	0.63

¹ It is permissible to exceed the stated energy in emergency stop situations. In the event of such a case, please contact ACE.

² The effective weight range limits can be raised or lowered on request.

³ If side load angle is higher contact ACE.

WARNING

- Temperature effect:** The W₃ and me values given in the performance table (see manual or catalogue) are valid for room temperature. Deviating values apply to higher temperatures.
- During installation of the dampers moving masses can lead to injuries due to inadvertent starting. Secure moving masses against inadvertent moving.**
- The dampers may be unsuitable for use and have an insufficient damping effect. Check the specific suitability of the dampers before installation.**
- If operated outside of the operating temperature range, the damper can lose its function. Operating temperature range must be maintained. Do not paint dampers due to heat emission.**
- Fluids, gases and dirt particles in the surrounding area can attack or destroy the seal system of the damper and cause it to fail. Protect or encapsulate piston rod and seal system from external materials in the surrounding area.**
- Damage to the piston rod surface can destroy the seal system. Do not grease, oil piston rod etc. and protect against dirt particles.**
- The piston rod can be torn from the damper. Do not load the piston rod with tensile stress.**
- Damper can tear off upon impact. Always lay out the connection structure in such a way that the maximum occurring forces can be absorbed with sufficient safety. The maximum reacting forces listed in the calculation range may deviate from the actually occurring reacting forces, as these are based on theoretical values.**

Packaging disposal

Please dispose of the transportation packaging in an environmentally-friendly manner. Recycling packaging materials saves raw materials and reduces waste. The packaging materials do not contain any prohibited materials.

Model type prefix

Standard types

MC: self-contained with return spring, self-compensating

Special types

MCA: not self-contained, without spring. Use only with external air/oil tank.

MCS: not self-contained, with spring. Use only with external air/oil tank.

MCN: self-contained, without spring

Mounting instructions and mounting accessories

M33x1.5 mounting accessories

MC33

Before installation check whether the identification number on the packaging matches the respective designation on the delivery note.

Note the dimensioning for mounting when using accessory parts. Bolts for fitting of accessories are not included.


If you have any questions, please phone +49 (0)2173 - 9226-20 for free advice.

mounting instructions for accessories delivered separately.

When using accessory parts and mounting elements also note the

C33

Clevis Mounting Kit

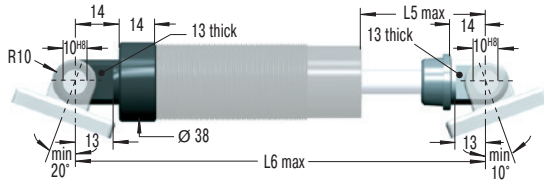


Dimensions

TYPES	L5 max. mm	L6 max. mm
MC, MA, ML3325EUM	39	168
MC, MA, ML3350EUM	64	218


SF33

Clevis Flange

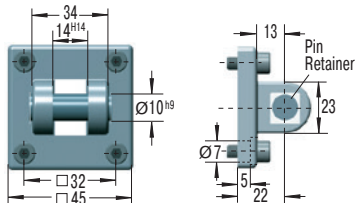



QF33

Square Flange



S33

Side Foot Mounting Kit

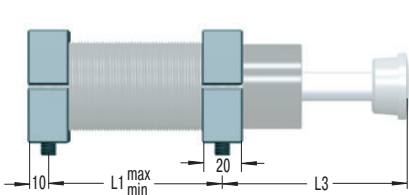


Dimensions

TYPES	L1 min. mm	L1 max. mm	L3 mm
MC, MA, ML3325EUM	25	60	68
MC, MA, ML3350EUM	32	86	93


Mounting types

Mounting with Square Flange QF




If mounted with 4 bolts
Torque max.: 11 Nm
Clamping torque: > 90 Nm

Mounting of damper in borehole with two locking rings




Torque: 80 Nm

Mounting with Foot Mount S




S33 = 2 flange + 4 bolts M6x40, DIN 912
Because of the thread pitch the fixing holes for the second foot mount should only be drilled and tapped after the first foot mount has been fixed in position.
Torque max.: 11 Nm (bolt)
Clamping torque: 90 Nm

Screwing the damper into a threaded hole with additional locking ring



Torque: 80 Nm

Mounting with Clevis Mounting Kit C



C33 = 2 clevis eyes. Delivered assembled to shock absorber.
Use positive stop at both ends of travel.

SF33 = flange + 4 bolts M6x20, DIN912
Torque max.: 7,5 Nm
Secure with pin or use additional bar. Due to limited force absorption, the respective suitability should be reviewed by ACE.

Mounting instructions and mounting accessories

Installation instructions

Before installation and use check whether the identification number on the damper or on the packaging matches the respective designation on the delivery note. Industrial shock absorbers are maintenance-free and ready to install.

Operating temperature range: -12 °C to 66 °C

Mounting: As required but always in such a way that the entire damper stroke is used. The dampers must always be mounted in such a way that the forces are introduced centrally over the piston rod. The maximum permissible side load angle (see table) must not be exceeded. If there is a side load angle, it generally leads to a reduction in service life. In the case of maximum permissible values being exceeded a side load adapter must be used.

Self-compensating: The MC range of shock absorbers is self-compensating. In a selectable range according to a table, the different effects of power, weight, temperature and speed balance out independently. The shock absorbers are divided into five hardness ranges (me min. to me max.) as standard. The grading ranges from -0 (very soft) to -4 (very hard).

Commissioning


- After installation, start a test run of the moving mass at reduced operating speed to begin with.

During the test run

- Gradually accelerate the load capacity up to the subsequent operating speed. You can find this in the calculation for your application. In the correct final setting, the piston rod of the shock absorber reaches the end position (positive stop) without a hard stop.

Mounting accessories

Information on the corresponding mounting accessories can be found on the following pages.

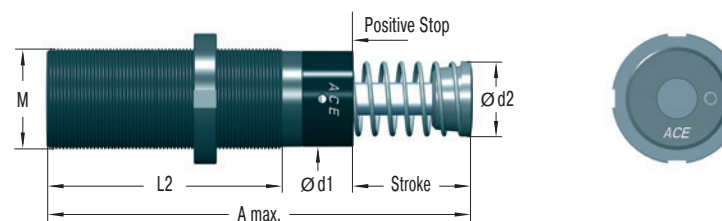

Thread UNF 1 3/4-12 (omit suffix -M from part number)

Dimensions

TYPES	Stroke mm	A max. mm	d1 mm	d2 mm	L2 mm	M
MC4525EUM	23.1	145	42	35	95	M45x1.5
MC4550EUM	48.5	195	42	35	120	M45x1.5
MC4575EUM	73.9	246	42	35	145	M45x1.5

Performance data

TYPES	Max. Energy Capacity				Effective Weight			Return Force min. N	Return Force max. N	Return Time s	Side Load Angle max. °	Weight kg
	¹ W ₃ Nm/cycle	W ₄ Nm/h	W ₄ with Oil Tank Nm/h	W ₄ with Oil Recirculation Nm/h	² me min. kg	² me max. kg	Hardness					
MC4525EUM-0	370	107,000	158,000	192,000	7	27	-0	70	100	0.03	4	1.14
MC4525EUM-1	370	107,000	158,000	192,000	20	90	-1	70	100	0.03	4	1.14
MC4525EUM-2	370	107,000	158,000	192,000	80	310	-2	70	100	0.03	4	1.14
MC4525EUM-3	370	107,000	158,000	192,000	260	1,050	-3	70	100	0.03	4	1.14
MC4525EUM-4	370	107,000	158,000	192,000	890	3,540	-4	70	100	0.03	4	1.14
MC4550EUM-0	740	112,000	192,000	248,000	13	54	-0	70	145	0.08	3	1.36
MC4550EUM-1	740	112,000	192,000	248,000	45	180	-1	70	145	0.08	3	1.36
MC4550EUM-2	740	112,000	192,000	248,000	150	620	-2	70	145	0.08	3	1.36
MC4550EUM-3	740	112,000	192,000	248,000	520	2,090	-3	70	145	0.08	3	1.36
MC4550EUM-4	740	112,000	192,000	248,000	1,800	7,100	-4	70	145	0.08	3	1.36
MC4575EUM-0	1,130	146,000	225,000	282,000	20	80	-0	50	180	0.11	2	1.59
MC4575EUM-1	1,130	146,000	225,000	282,000	70	270	-1	50	180	0.11	2	1.59
MC4575EUM-2	1,130	146,000	225,000	282,000	230	930	-2	50	180	0.11	2	1.59
MC4575EUM-3	1,130	146,000	225,000	282,000	790	3,140	-3	50	180	0.11	2	1.59
MC4575EUM-4	1,130	146,000	225,000	282,000	2,650	10,600	-4	50	180	0.11	2	1.59

¹ It is permissible to exceed the stated energy in emergency stop situations. In the event of such a case, please contact ACE.

² The effective weight range limits can be raised or lowered on request.

³ If side load angle is higher contact ACE.

WARNING

- Temperature effect:** The W₃ and me values given in the performance table (see manual or catalogue) are valid for room temperature. Deviating values apply to higher temperatures.
- During installation of the dampers moving masses can lead to injuries due to inadvertent starting. Secure moving masses against inadvertent moving.**
- The dampers may be unsuitable for use and have an insufficient damping effect. Check the specific suitability of the dampers before installation.**
- If operated outside of the operating temperature range, the damper can lose its function. Operating temperature range must be maintained. Do not paint dampers due to heat emission.**
- Fluids, gases and dirt particles in the surrounding area can attack or destroy the seal system of the damper and cause it to fail. Protect or encapsulate piston rod and seal system from external materials in the surrounding area.**
- Damage to the piston rod surface can destroy the seal system. Do not grease, oil piston rod etc. and protect against dirt particles.**
- The piston rod can be torn from the damper. Do not load the piston rod with tensile stress.**
- Damper can tear off upon impact. Always lay out the connection structure in such a way that the maximum occurring forces can be absorbed with sufficient safety. The maximum reacting forces listed in the calculation range may deviate from the actually occurring reacting forces, as these are based on theoretical values.**

Packaging disposal

Please dispose of the transportation packaging in an environmentally-friendly manner. Recycling packaging materials saves raw materials and reduces waste. The packaging materials do not contain any prohibited materials.

Model type prefix

Standard types

MC: self-contained with return spring, self-compensating

Special types

MCA: not self-contained, without spring. Use only with external air/oil tank.

MCS: not self-contained, with spring. Use only with external air/oil tank.

MCN: self-contained, without spring

Mounting instructions and mounting accessories

M45x1.5 mounting accessories

MC45

Before installation check whether the identification number on the packaging matches the respective designation on the delivery note.

Note the dimensioning for mounting when using accessory parts. Bolts for fitting of accessories are not included.


If you have any questions, please phone +49 (0)2173 - 9226-20 for free advice.

mounting instructions for accessories delivered separately.

When using accessory parts and mounting elements also note the

C45

Clevis Mounting Kit

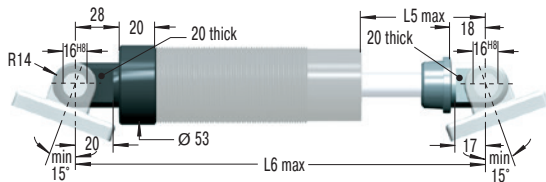


Dimensions

TYPES	L5 max.	L6 max.
	mm	mm
MC, MA, ML4525EUM	43	200
MC, MA, ML4550EUM	68	250
MC, MA4575EUM	93	301


SF45

Clevis Flange

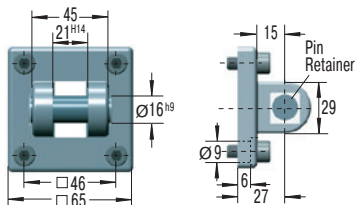


QF45

Square Flange



S45

Side Foot Mounting Kit

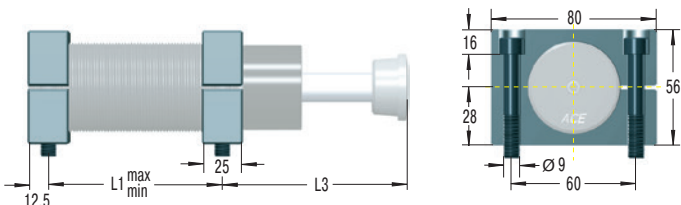


Dimensions

TYPES	L1 min.	L1 max.	L3
	mm	mm	mm
MC, MA, ML4525EUM	32	66	66
MC, MA, ML4550EUM	40	92	91
MC, MA4575EUM	50	118	116


Mounting types

Mounting with Square Flange QF




If mounted with 4 bolts
Torque max.: 27 Nm
Clamping torque: > 200 Nm

Mounting of damper in borehole with two locking rings




Torque: 235 Nm

Mounting with Foot Mount S




S45 = 2 flange + 4 bolts M8x50, DIN 912
Because of the thread pitch the fixing holes for the second foot mount should only be drilled and tapped after the first foot mount has been fixed in position.
Torque max.: 27 Nm (bolt)
Clamping torque: 350 Nm

Screwing the damper into a threaded hole with additional locking ring



Torque: 235 Nm

Mounting with Clevis Mounting Kit C



C45 = 2 clevis eyes. Delivered assembled to shock absorber.
Use positive stop at both ends of travel.

SF45 = flange + 4 bolts M8x20, DIN912
Torque max.: 7,5 Nm
Secure with pin or use additional bar. Due to limited force absorption, the respective suitability should be reviewed by ACE.

Mounting instructions and mounting accessories

Installation instructions

Before installation and use check whether the identification number on the damper or on the packaging matches the respective designation on the delivery note. Industrial shock absorbers are maintenance-free and ready to install.

Operating temperature range: -12 °C to 66 °C

Mounting: As required but always in such a way that the entire damper stroke is used. The dampers must always be mounted in such a way that the forces are introduced centrally over the piston rod. The maximum permissible side load angle (see table) must not be exceeded. If there is a side load angle, it generally leads to a reduction in service life. In the case of maximum permissible values being exceeded a side load adapter must be used.

Self-compensating: The MC range of shock absorbers is self-compensating. In a selectable range according to a table, the different effects of power, weight, temperature and speed balance out independently. The shock absorbers are divided into five hardness ranges (me min. to me max.) as standard. The grading ranges from -0 (very soft) to -4 (very hard).

Commissioning


- After installation, start a test run of the moving mass at reduced operating speed to begin with.

During the test run

- Gradually accelerate the load capacity up to the subsequent operating speed. You can find this in the calculation for your application. In the correct final setting, the piston rod of the shock absorber reaches the end position (positive stop) without a hard stop.

Mounting accessories

Information on the corresponding mounting accessories can be found on the following pages.

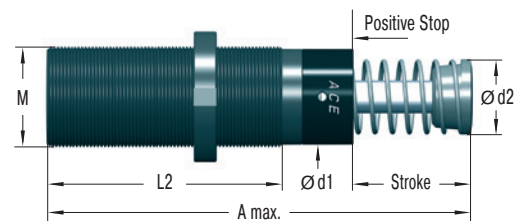

150 mm stroke model does not include stop collar.
Positive stop is provided by the rod end button (Ø 60 mm) and a stop block.
Thread UNF 2 1/2-12 (omit suffix -M from part number)

Dimensions

TYPES	Stroke mm	A max. mm	d1 mm	d2 mm	L2 mm	M
MC6450EUM	48.6	225	60	48	140	M64x2
MC64100EUM	99.4	326	60	48	191	M64x2
MC64150EUM	150	450	60	48	241	M64x2

Performance data

TYPES	Max. Energy Capacity				Effective Weight			Return Force min. N	Return Force max. N	Return Time s	Side Load Angle max. °	Weight kg
	¹ W ₃ Nm/cycle	W ₄ Nm/h	W ₄ with Oil Tank Nm/h	W ₄ with Oil Recirculation Nm/h	² me min. kg	² me max. kg	Hardness					
MC6450EUM-0	1,870	146,000	293,000	384,000	35	140	-0	90	155	0.12	4	2.9
MC6450EUM-1	1,870	146,000	293,000	384,000	140	540	-1	90	155	0.12	4	2.9
MC6450EUM-2	1,870	146,000	293,000	384,000	460	1,850	-2	90	155	0.12	4	2.9
MC6450EUM-3	1,870	146,000	293,000	384,000	1,600	6,300	-3	90	155	0.12	4	2.9
MC6450EUM-4	1,870	146,000	293,000	384,000	5,300	21,200	-4	90	155	0.12	4	2.9
MC64100EUM-0	3,730	192,000	384,000	497,000	70	280	-0	105	270	0.34	3	3.7
MC64100EUM-1	3,730	192,000	384,000	497,000	270	1,100	-1	105	270	0.34	3	3.7
MC64100EUM-2	3,730	192,000	384,000	497,000	930	3,700	-2	105	270	0.34	3	3.7
MC64100EUM-3	3,730	192,000	384,000	497,000	3,150	12,600	-3	105	270	0.34	3	3.7
MC64100EUM-4	3,730	192,000	384,000	497,000	10,600	42,500	-4	105	270	0.34	3	3.7
MC64150EUM-0	5,650	248,000	497,000	644,000	100	460	-0	75	365	0.48	2	5.1
MC64150EUM-1	5,650	248,000	497,000	644,000	410	1,640	-1	75	365	0.48	2	5.1
MC64150EUM-2	5,650	248,000	497,000	644,000	1,390	5,600	-2	75	365	0.48	2	5.1
MC64150EUM-3	5,650	248,000	497,000	644,000	4,700	18,800	-3	75	365	0.48	2	5.1
MC64150EUM-4	5,650	248,000	497,000	644,000	16,000	63,700	-4	75	365	0.48	2	5.1

¹ It is permissible to exceed the stated energy in emergency stop situations. In the event of such a case, please contact ACE.

² The effective weight range limits can be raised or lowered on request.

³ If side load angle is higher contact ACE.

WARNING

- Temperature effect:** The W₃ and me values given in the performance table (see manual or catalogue) are valid for room temperature. Deviating values apply to higher temperatures.
- During installation of the dampers moving masses can lead to injuries due to inadvertent starting. Secure moving masses against inadvertent moving.**
- The dampers may be unsuitable for use and have an insufficient damping effect. Check the specific suitability of the dampers before installation.**
- If operated outside of the operating temperature range, the damper can lose its function. Operating temperature range must be maintained. Do not paint dampers due to heat emission.**
- Fluids, gases and dirt particles in the surrounding area can attack or destroy the seal system of the damper and cause it to fail. Protect or encapsulate piston rod and seal system from external materials in the surrounding area.**
- Damage to the piston rod surface can destroy the seal system. Do not grease, oil piston rod etc. and protect against dirt particles.**
- The piston rod can be torn from the damper. Do not load the piston rod with tensile stress.**
- Damper can tear off upon impact. Always lay out the connection structure in such a way that the maximum occurring forces can be absorbed with sufficient safety. The maximum reacting forces listed in the calculation range may deviate from the actually occurring reacting forces, as these are based on theoretical values.**

Packaging disposal

Please dispose of the transportation packaging in an environmentally-friendly manner. Recycling packaging materials saves raw materials and reduces waste. The packaging materials do not contain any prohibited materials.

Model type prefix

Standard types

MC: self-contained with return spring, self-compensating

Special types

MCA: not self-contained, without spring. Use only with external air/oil tank.

MCS: not self-contained, with spring. Use only with external air/oil tank.

MCN: self-contained, without spring

Mounting instructions and mounting accessories

M64x2 mounting accessories

mounting instructions for accessories delivered separately.

MC64

Before installation check whether the identification number on the packaging matches the respective designation on the delivery note.


Note the dimensioning for mounting when using accessory parts. Bolts for fitting of accessories are not included.

If you have any questions, please phone +49 (0)2173 - 9226-20 for free advice.

When using accessory parts and mounting elements also note the

C64

Clevis Mounting Kit

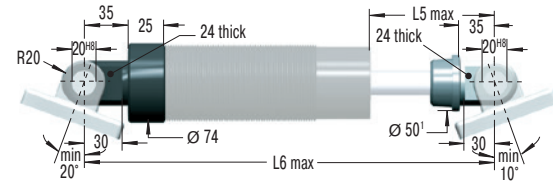


¹ With 150 mm stroke Dia. 60 mm. Order C64-150.

Dimensions

TYPES	L5 max. mm	L6 max. mm
ML6425EUM	60	260
MC, MA, ML6450EUM	85	310
MC, MA64100EUM	136	410
MC, MA64150EUM	187	530


SF64

Clevis Flange

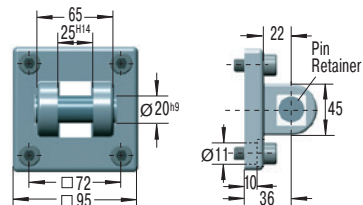


QF64

Square Flange





QF90

Square Flange



S64

Side Foot Mounting Kit

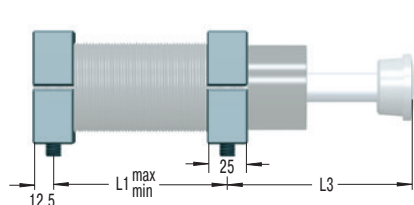


Dimensions

TYPES	L1 min. mm	L1 max. mm	L3 mm
ML6425EUM	40	86	75.5
MC, MA, ML6450EUM	50	112	100
MC, MA64100EUM	64	162	152
MC, MA64150EUM	80	212	226


Mounting types

Mounting with Square Flange QF




If mounted with 4 bolts
Torque max.: 50 Nm
Clamping torque: > 210 Nm

Mounting of damper in borehole with two locking rings




Torque: 780 Nm

Mounting with Foot Mount S




S64 = 2 flange + 4 bolts M10x80, DIN 912
Because of the thread pitch the fixing holes for the second foot mount should only be drilled and tapped after the first foot mount has been fixed in position.
Torque max.: 50 Nm (bolt)
Clamping torque: 350 Nm

Screwing the damper into a threaded hole with additional locking ring



Torque: 780 Nm

Mounting with Clevis Mounting Kit C



C64 = 2 clevis eyes. Delivered assembled to shock absorber.
Use positive stop at both ends of travel.

SF64 = flange + 4 bolts M10x20, DIN912
Torque max.: 15 Nm
Secure with pin or use additional bar. Due to limited force absorption, the respective suitability should be reviewed by ACE.

Manual

Warranty

Fundamentally, all modifications to the product by third parties lead to exclusion from the warranty.

Obvious defects must be reported to the vendor in writing immediately after delivery, no later than one week, but in any case before processing or installation, otherwise the assertion of a warranty claim is excluded. A timely dispatch is sufficient to keep the term.

The vendor is to be given an opportunity to check on site. If the complaint is justified the vendor offers warranty by repair or replacement at its own discretion. If the rectification fails, the buyer may choose to demand reduction of payment or cancellation of the contract. If there is only a minor lack of conformity, particularly with only minor defects, the buyer nevertheless has a right of withdrawal.

If, after failed rectification, the buyer chooses to cancel the contract due to a defect of title or material defect, they are not entitled to additionally claim for damages.

If, after failed fulfilment, the buyer chooses compensation, the goods remain with the buyer, if this is reasonable. The compensation is limited to the difference between the purchase price and the value of the defective item. This does not apply if the vendor maliciously causes the breach of contract.

The quality of the goods is only considered as agreed upon with the product description of the vendor. Public statements, claims or advertising of the manufacturer do not represent an additional contractual specification of quality of the goods.

If the buyer receives defective mounting instructions, the buyer is only obligated to deliver defect-free mounting instructions and only if the defect to the mounting instructions prevents proper mounting.

The warranty period is two years and begins upon completion. Exchange and return of custom products are fundamentally excluded. The factory conditions of the manufacturing factory apply to parts not manufactured and processed by the vendor, which can be viewed by the orderer at the vendor at any time. Construction and installation parts are delivered according to the present standard of engineering.

Service life

In general industrial shock absorbers are machine elements that are subject to wear. Wear parts such as seals, pressure chambers and pistons are excluded from the general warranty. The wear of seals is largely dependent upon the operating conditions and the respective application and its operating parameters.

In general with this model of industrial shock absorber with grooved ring wiper seal system an average service life of three to five million load changes can be expected. Adverse environmental and operating conditions can significantly reduce the expected service life.

Technical data

Energy capacity: 170 Nm/cycle to 5,650 Nm/cycle

Impact velocity range: 0.15 m/s to 5 m/s (depending on type and calculation of effective weight). Other speeds on request.

Operating temperature range: -12 °C to +66 °C. Other temperatures on request.

Mounting: in any position

Positive stop: integrated

Material: Outer body:	Nitride hardened steel;
Piston rod:	Hard chrome plated steel
Piston rod seal:	NBR
Rod end button:	Steel hardened and corrosion-resistant coating
Return spring:	Zinc plated or plastic-coated steel;
Accessories:	Steel with black oxide finish or nitride hardened

Permissible torque of locknut:

MC33: 80 Nm

MC45: 235 Nm

MC64: 780 Nm

Damping medium: Automatic Transmission Fluid (ATF)

Application field: Linear slides, Swivel units, Turntables, Portal systems, Machines and plants, Tool machines, Machining centres, Z-axes, Impact panels

Note: A noise reduction of 3 to 7 dB is possible when using the special impact button (PP). It is permissible to exceed the stated energy in emergency stop situations and continuous use (with external cooling). In the event of such a case, please contact ACE.

Safety instructions: External materials in the surrounding area can attack the sealing components and lead to a shorter service life. Please contact ACE for appropriate solution suggestions. Do not paint the shock absorbers due to heat emission.

On request: Special oils, nickel-plated, increased corrosion protection, mounting inside air cylinders or other special options are available on request.